

COMPACT 3-AXIS INDOOR IR DOME CAMERA

SK-D385IR/M863, SK-D385IR/M873

Features


- 3-AXIS Bracket for 3D(Pan/Tilt/Roll) rotation with compact size(Ø85)
- Day & Night function(Electronic D&N)
- 1/3" COLOR SONY SUPER HAD CCD II
- Supreme Resolution(600TV-Line) : SK-D385IR/M863
- 15M range visible in total darkness with 14pcs of IR LEDs
- IR LED output level controllable via RS-485
- Extra video connector for easy installation
- Multi language full OSD support
- RS-485 interface(PELCO-D, PELCO-P protocol support)
- MULTI FUNCTION : Lens Shading Compensation, High Light Mask, Motion Detection, Privacy Zone, Defect Pixel Correction, Impact Detection



INDOOR IR DOME
CAMERA

Dimension

Unit : mm

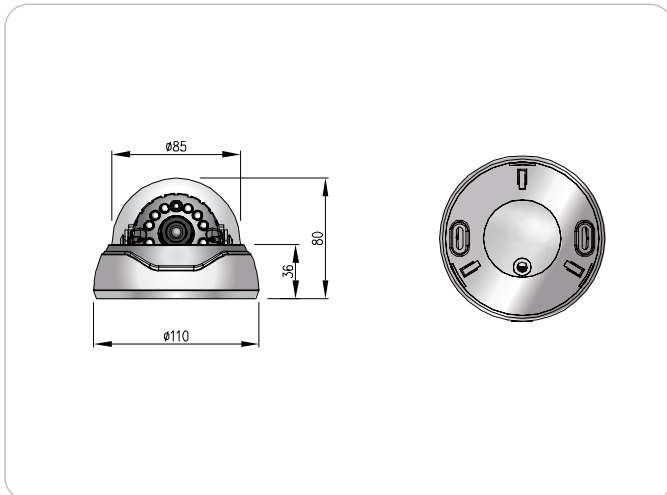

Specification

Model	SK-D385IR/M863	SK-D385IRM873
Image Sensor	1/3" COLOR SONY SUPER HAD CCD II	
Pixel	410K	270K
Scanning	2:1 Interlace	
Sync. Type	Internal	
Resolution	600TV-Line	380TV-Line
Video Output	1.0Vp-p(Sync. Negative) Termination 75Ω	
S/N Ratio	48dB or More(AGC OFF)	
Min. Illumination(Indoor)	0Lux(15M Range) : LED ON 0.1Lux(F/1.2) : LED OFF	0Lux(15M Range) : LED ON 0.05Lux(F/1.2) : LED OFF
Gamma	$\gamma=0.45$ typ.(0.45, 0.6, 1.0 Adjustable)	
Shutter Speed	1/60(1/50) ~ 1/100,000sec	
OSD	YES	
Motion Detection	ON/OFF(64 Zone)	
Impact Detection	ON/OFF	
Privacy Zone	ON/OFF(4 Zone)	
White Balance	ATW/MANUAL/AWC(2,500°K ~ 9,500°K)	
Backlight	BLC/HLC/OFF	
AGC	LOW/MIDDLE/HIGH/OFF	
Communication(Optional)	RS-485(Pelco-D, Pelco-P)	
Lens	Fixed focal lens	
LED	14pcs(LOW/MIDDLE/HIGH/OFF)	
Power Supply	Regulated 12V DC \pm 10%	
Current Consumption	Max. 250mA	
Operation Temp.	-10°C ~ 50°C	
Preservation Temp.	-20°C ~ 60°C	
Dimension	Ø110x80(H)mm	
Weight	Approx. 230g	